




GAS STORAGE HOT WATER SYSTEM



THE THERMANN 4* GAS HOT WATER HEATER CAN SUIT ANY FAMILY TYPE. WITH AN ADJUSTABLE THERMOSTAT FOR SAFETY AND EFFICIENCY IT ALLOWS YOU TO BE IN CONTROL OF YOUR OPERATING COSTS AND PERFORMANCE. THE UNIT HAS A SMALL FOOTPRINT WHICH MAKES IT IDEAL FOR REPLACING A 3* CHANGEOVER.

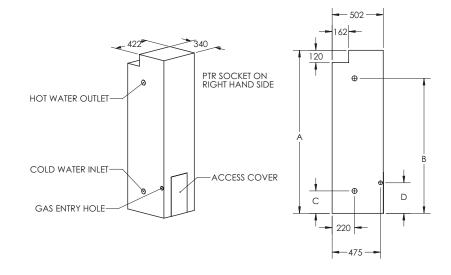

SPECIFICATIONS

Gas Tank

Measurements	135L	170L
Capacity (litres)	135	170
Net Weight Empty (kg)	72	86
Relief Valve Pressure (kPA)	1400	1400
Gas Consumption (MJ/h)	135NG = 29.5	170NG = 33.5
	135LPG = 28	
Recovery rate @ 45°C rise (L/hr)	130	146
First Hr Delivery	265	316
Dimensions (mm)	135L	170L
Height (A)	1600	1900
Hot Water Outlet (B)	1325	1620
Cold Water Inlet (C)	220	220
Gas Inlet (D)	300	300
Water Inlet/Outlet	Left	Left

Specifications correct for gas storage models manufactured after 1 August 2016.

	135L	170L
No. People	3-4	4-5





Parts and labour


ELECTRIC LARGE


HOT WATER SYSTEM



THERMANN ELECTRIC STORAGE HOT WATER UNITS

ARE AN INSULATED STORAGE VESSEL EFFICIENTLY STORING HOT WATER, READY FOR USE, WHEN YOU NEED IT. THE THERMANN RANGE OF ELECTRIC WATER HEATERS OFFER SOLUTIONS IN EIGHT DIFFERENT SIZES TO SUIT YOUR NEEDS.





SPECIFICATIONS

Electric Tank

Measurements	80L	125L	160L	250L	315L	400L
Total Height (A)	925	1090	1315	1445	1745	1705
Total Diameter (B)	490	530	530	615	615	705
Outlet Height (C)	735	865	1120	1211	1531	1445
Inlet Height (D)	160	190	190	195	195	220
Electrical Entry (E)	85	100	100	105	105	130
Element Angle (K)	55°	55°	55°	72°	72°	72°
Storage Capacity	88	130	161	259	321	415
Hot Water Delivery	80	125	160	250	315	400
Net Weight Empty	41	51	61	72	92	110
Element Sizes (kW)	3.6	1.8, 3.6	2.4, 3.6	3.6	3.6	3.6
	Re	elief Valv	e			
Pressure (kPa)	1000	1000	1000	1000	1000	1000
Max Inlet Pressure						
Without an ECV (kPa)	800	800	800	800	800	800
With an ECV (kPa)	650	650	650	650	650	650

	80L	125L	160L
Inlet/Outlet	Dual Handed	Dual Handed	Dual Handed
No. People (continuous)	2-3	3-4	3-5
No. People (off peak)	0	0	1-3
	250L	315L	400L
Inlet/Outlet	250L Dual Handed	315L Dual Handed	400L Dual Handed
Inlet/Outlet No. People (continuous)	Dual	Dual	Dual






Cylinder

Parts and labour

ELECTRIC SMALL HOT WATER SYSTEM



THERMANN SMALL ELECTRIC STORAGE HOT WATER UNITS ALLOW YOU TO INSTALL HOT WATER WHERE SPACE AND ACCESS IS RESTRICTIVE. WITH ITS "V FIT" CONFIGURATION, INLETS AND OUTLETS ARE CONFIGURED FOR EASE OF INSTALLATION. AVAILABLE IN 'APPLIANCE WHITE' FOR A MORE AESTHETICALLY PLEASING UNIT.



SPECIFICATIONS

Electric Tank

Measurements	25L	50L		
Total Height (A)	455	695		
Total Diameter (B)	405	405		
Outlet Height (C)	280	520		
Inlet Height (D)	155	155		
Electrical Entry (E)	65	65		
Element Angle (K)	55°	55°		
Storage Capacity (litres)	31	53		
Hot Water Delivery (litres)	25	50		
Net Weight Empty (kg)	17	23		
Element Size (kW)	2.4*, 3.6	2.4*, 3.6		
Relief Val	ve			
Pressure (kPa)	1000	1000		
Max Inlet Pressure				
Without an ECV (kPa)	800	800		
With an ECV (kPa)	650	650		

^{*2.4}kW plug in only

	25L	50L
Inlet/Outlet	Dual Handed	Dual Handed
No. People (continuous)	1	1-2
No. People (off peak)	0	0






Parts and labou

CONTINUOUS FLOW 5*

HOT WATER SYSTEMS



THE THERMANN 5* GAS CONTINUOUS FLOW SYSTEM HEATS WATER AS IT FLOWS THROUGH A COILED PIPE AROUND A GAS BURNER, WHICH MEANS YOU'LL NEVER RUN OUT OF HOT WATER.

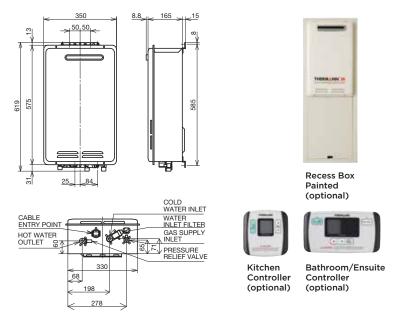

SPECIFICATIONS

Continuous Flow 5*

Measurements	16L	20L	26L
Nominal hourly gas consumption (MJ/h)	125	160	200
Test point pressure NG (kPa)	0.4	0.56	0.68
Test point pressure LPG (kPa)	0.4	0.61	0.7
Minimum water pressure (kPa)	260	260	210
Maximum water pressure (kPa)	1200	1200	1200
Minimum gas inlet pressure (kPa)	NG 1.13 LPG 2.75	NG 1.13 LPG 2.75	NG 1.13 LPG 2.75
Maximum gas inlet pressure (kPa)	NG 5.0 LPG 7.0	NG 5.0 LPG 7.0	NG 5.0 LPG 7.0
Minimum Flow Rate Ignition (I/min)	2.7	2.7	2.7
Input voltage single phase 50Hz (v)	240	240	240
Maximum output current (A)	0.42	0.45	0.47
Inlet gas connection male thread	R3/4" (20mm)	R3/4" (20mm)	R3/4" (20mm)
Cold water connection male thread	R1/2" (15mm)	R1/2" (15mm)	R3/4" (20mm)
Hot water connection male thread	R1/2" (15mm)	R1/2" (15mm)	R3/4" (20mm)
Relief valve pressure setting (kPa)	1400	1400	1400
Weight dry (kg)	16	16	17
Dimensions (HxWxDmm)	575x350x165	575x350x165	575x350x165

Optional Accessories	Code
Kitchen controller with 15m cable	9504157
Bathroom controller with 15m cable	9504158
Ensuite controller with 15m cable	9504159
Recess Box Gal	9504553
Recess Box Painted	9504555
Locking Bracket	9504554

	16L	20L	26L
No. Bathrooms	1	1-2	2-3
Energy Rating (Stars)	5.2	5.3	5.8
Capacity @ 25° rise (L/min)	16L	20L	26L
Capacity @ 40° rise (L/min)	10	12.5	16.25
Gas Type Available	NG, LPG	NG, LPG	NG, LPG






CONTINUOUS FLOW 6*

HOT WATER SYSTEMS



THE THERMANN 6*, ENERGY EFFICIENT GAS
CONTINUOUS FLOW UNIT ENSURES YOU WILL
HAVE ENOUGH HOT WATER, WHEN YOU NEED
IT. WITH A 12 YEAR WARRANTY, YOU CAN REST
ASSURED YOU ARE COVERED FOR THE LIFE
OF THE UNIT, AND UNIVERSAL CONTROLLERS
ENSURE YOU ALWAYS HAVE PRECISE CONTROL
OF YOUR HOT WATER TEMPERATURE SETTINGS.





Recess Box Painted (optional)



Universal Controller (optional)

SPECIFICATIONS

Continuous Flow 6*

Measurements	16L	20L	26L
Nominal hourly gas consumption by proportional electronic gas control (MJ/h)	125	158	200
Test point pressure (Natural Gas) (kPa)	0.56	0.8	0.8
Test point pressure (Propane) (kPa)	0.91	1.4	1.5
Minimum water pressure (kPa)	60	90	110
Maximum water pressure (kPa)	1200	1200	1200
Minimum gas inlet pressure (kPa)	NG 1.13 LPG 2.75	NG 1.13 LPG 2.75	NG 1.13 LPG 2.75
Maximum gas inlet pressure (kPa)	NG 5.0 LPG 7.0	NG 5.0 LPG 7.0	NG 5.0 LPG 7.0
Minimum Flow Rate Ignition (I/min)	2.7	2.7	2.7
Input voltage single phase 50Hz (V)	240	240	240
Maximum output current (A)	0.39	0.45	0.46
Inlet gas connection male thread	R3/4" (20mm)	R3/4" (20mm)	R3/4" (20mm)
Cold water connection male thread	R3/4" (20mm)	R3/4" (20mm)	R3/4" (20mm)
Hot water connection male thread	R3/4" (20mm)	R3/4" (20mm)	R3/4" (20mm)
Relief valve pressure setting (kPa)	1400	1400	1400
Weight dry (kg)	15	15	16
Dimensions (HxWxDmm)	520x350x200	520x350x200	520x350x200

IAPMO Approval certificate no. GMK10409. Watermark Certificate of compliance WM-000506

Optional Accessories	Code
Universal controller with 15m cable	9505082
6* Recess Box Painted	9505219
6* Recess Box Gal	9505218
6* Locking Bracket	9504679
6* Flue Diverter	9505161

	16L	20L	26L
No. Bathrooms	1	1-2	2-3
Energy Rating (Stars) (50°C)	6.3	6.5	6.1
Energy Rating (Stars) (60°C)	6.0	6.0	6.0
Capacity @ 25° rise (L/min)	16L	20L	26L
Capacity @ 40° rise (L/min)	10	12.5	16.25
Gas Type Available	NG, LPG	NG, LPG	NG, LPG







EVACUATED TUBE SOLAR **ELECTRIC BOOSTED**



THERMANN EVACUATED TUBE SOLAR **ELECTRIC BOOSTED SYSTEMS HARNESS** THE SUN'S ENERGY TO HEAT YOUR WATER. AN ELECTRIC ELEMENT IN THE TANK PROVIDES BACK UP IF NEEDED, ENSURING PEACE OF MIND, WHILST ALSO REDUCING YOUR RUNNING COSTS.





SPECIFICATIONS

Electric Boosted Tank

Measurements (mm)	250L BOT	315L BOT	315L MID	400L BOT	400L MID
Tank Diameter (A)	617	617	617	705	705
Tank Height (B)	1445	1765	1765	1704	1704
HW Outlet	1211	1531	1531	1445	1445
PTRV Port	1211	1531	1531	1445	1445
Top Sensor Port	786	872	872	809	832
Solar Return Port	567	566	504	536	554
Bottom Sensor	347	355	326	340	357
Solar Flow	197	197	197	219	219
Cold Water Inlet	197	197	197	219	219
Dry Weight (kg)	71	92	92	116	116

Selecting the right unit for you

	250L	315L	400L
No. People	3-5	4-6	5-9
No. Tubes	22	30	44

*Other kit configurations available







Parts and Labour Tank

Roof Collector


Measurements (mm)		Dry Weight		
Collector	Width (A)	Length (B)	WO/Tubes	W/Tubes
22 Tubes	1636	2005	20kg	80.7kg
30 Tubes	2196	2005	24kg	105.7kg

Dry weights based on 2 track flush mount frame.

EVACUATED TUBE SOLAR GAS BOOSTED



THERMANN EVACUATED TUBE SOLAR GAS BOOSTED SYSTEMS OFFER RELIABILITY AND EFFICIENCY. PASSIVE SUN TRACKING MEANS MORE OF THE SUN'S RAYS ARE CONVERTED TO USABLE HOT WATER THROUGHOUT THE DAY - REDUCING YOUR POWER BILLS. WITH THE GAS BOOSTED CONTINUOUS FLOW UNIT, YOU'LL NEVER RUN OUT OF HOT WATER, NO MATTER THE WEATHER.

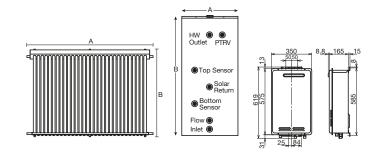

SPECIFICATIONS

Gas Boosted Tank

Measurements (mm)	250L GAS	315L GAS	400L GAS
Tank Diameter (A)	617	617	705
Tank Height (B)	1445	1765	1704
HW Outlet	1211	1531	1445
PTRV Port	1211	1531	1445
Top Sensor Port	992	1258	1208
Solar Return Port	764	953	932
Bottom Sensor	457	551	554
Solar Flow	197	197	219
Cold Water Inlet	197	197	219
Dry Weight (kg)	71	92	116

For 26L Gas Continuous Flow specifications and warranty information refer to page 6.

Roof Collector

Measurements (mm)		Dry Weight		
Collector	Width (A)	Length (B)	WO/Tubes	W/Tubes
22 Tubes	1636	2005	20kg	80.7kg
30 Tubes	2196	2005	24kg	105.7kg

Dry weights based on 2 track flush mount frame.

	160L	250L	315L	400L
No. People	1-2	3-5	4-6	5-9
No. Tubes	22	22	30	44
Gas Booster	26L	26L	26L	26L







es Tan

Parts and Labour

EVACUATED TUBE SOLAR

HOW IT WORKS

STEP 1


The sunlight strikes the dark absorber coating inside the tube.

STEP 2

The heat pipe transfers the heat up to the copper header pipe location in the insulated manifold box.


STEP 3

A circulator moves water from the storage tank to the copper pipe warming the water. The solar heated water is then pushed down into the storage tank for use. Anti-frost is built in to the Thermann system to ensure solar hot water can be provided even in cold regions.

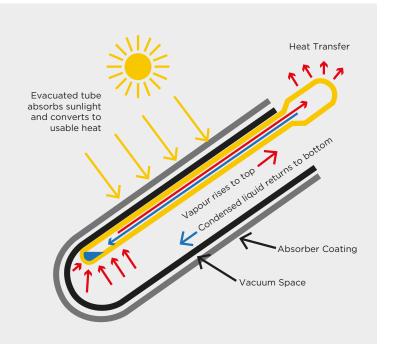


PASSIVE SUN TRACKING

The round tube design of the system passively tracks the sun throughout the day giving the highest possible performance from early morning through to late afternoon.




ELECTRIC & GAS SETUPS

Electric Booster




Gas Booster

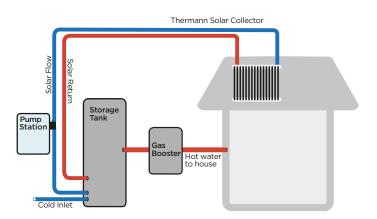



HEAT PUMP HOT WATER SYSTEM



MADE IN GERMANY, THE THERMANN HEAT PUMP EXTRACTS HEAT FROM AMBIENT AIR AND QUIETLY TRANSFERS IT TO HEAT WATER. IT COMES WITH A REMOVABLE INTAKE GRILL FOR EASY CLEANING AND SERVICING WHERE ACCESS IS LIMITED.









SPECIFICATIONS

Heat Pump

Heat output	kW
Heat output at A15/W15-55	1.7
Power consumption	kW
Consumption at A15/W15-55	0.5
Sound data	dB(A)
Sound pressure level at 1m distance in a free field	56
Energy data	kWh
Standby energy consumption/24h at 65°C (Air 15°C)	1.14
Electrical details	
Fuses	C 10 A
Rated voltage	240V
Phases	1/N/PE
Frequency	50Hz
Rated current	2.5 A
Max. power consumption	700W

^{*} ECV not supplied





Dimensions	
Capacity (litres)	300
Relief valve pressure (kPa)	700
Expansion control valve setting* (kPa)	550
Max Supply Pressure - without an ECV (kPa)	500
Max Supply Pressure - with an ECV (kPa)	420
Minimum water pressure (kPa)	200
Dimensions	mm
Height of unit when tilted	1990
Height (adjustable feet)	1870-1900
Diameter	670
Weights	kg
Weight (dry)	125
Weight (wet)	428
Connections	mm
Condensate drain	20
Water connection	RP3/4" (20mm)
Values	
Air flow rate	550 m3/h
Lower air temperature limit	0°C

HEAT PUMP HOT WATER SYSTEM

HOW IT WORKS AIR IN AIR OUT (THERMAL ENERGY) **HOT WATER OUTLET COLD WATER INLET**

- 1. A fan draws air through an evaporator. Thermal energy within the air is transferred to a liquid refrigerant causing it to change into a gas.
- 2. The refrigerant gas is then drawn into a compressor which increases the pressure and as a result increases the temperature.
- 3. A condenser (heat exchanger) then transports the hot gas refrigerant around the outside of the water tank. This heats the water inside the tank and the gaseous refrigerant reverts into a liquid.
- 4. The pressure of the refrigerant is reduced as it goes through an expansion valve and returns to the evaporator for the process to start again.



Reece. Works for you.™

Call **1800 032 566** or visit **www.reece.com.au** for your nearest Reece store. Due to limitations in the printing process the colours in this brochure are a guide only.

The manufacturer/distributor reserves the right to vary specifications or delete models from their range without prior notification. The manufacturer/distributor takes no responsibility for printing errors.

All products enjoy a product replacement warranty. For full warranty details visit www.reece.com.au/productquality



