

Roofstore Access Ladders



Convert unused space in your roof into a valuable storage area

TIMBER - RATED FOR 115 kgs



FEATURES AND BENEFITS:

- Easily adjustable spring tension.
- Power arm hinge features one piece construction, no welded joints.
- Extra corner bracing keeps stairway frame square.
- Complete installation kit with simple to understand instructions.
- Fits standard 600mm ceiling joist centres.
- Easy to install.
- Exclusive "EZ-Hang Strap" system for quick and easy installation.
- Wire rod under each step for strength

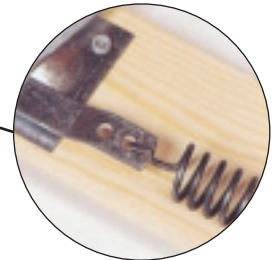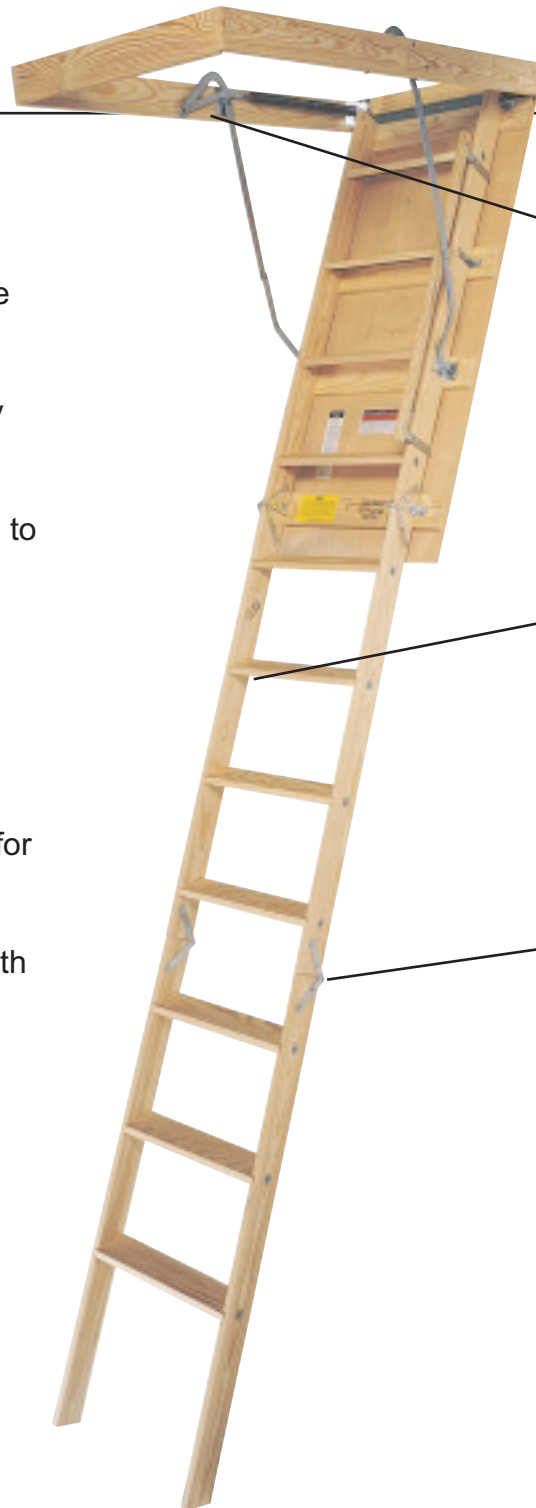

Easily adjustable spring tension




Wire rod under each step for strength



Metal hinges riveted on both sides of rail joints prevent side to side movement



Exclusive "EZ-Hang Strap" system for quick and easy installation

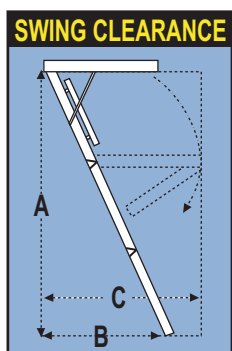

MODEL	APPROX. OPENING	(A) CEILING HEIGHT RANGE	(B) LANDING SPACE	(C) PROJECTION	STEP WIDTH X LENGTH X DEPTH	SIDE RAIL WIDTH X DEPTH	DOOR PANEL WIDTH X LENGTH
KASW01 DS	570 X 1370	2130 to 2665 84" to 105"	1700	1800	84 X 316 X 19	87 X 19	525 X 1327
KASW02 DS	570 X 1370	2665 to 3048 105" to 120"	1850	2000	84 X 316 X 19	87 X 19	525 X 1327

Roofstore Access Ladders

PO Box 17, Wurtulla QLD 4557
(07) 5492 3446 email@roofstore.com.au

Roofstore Trust trading as RoofStore Access Ladders
ABN 49 654 874 251 / BSA 1034125

Roofstore Access Ladders


Convert unused space in your roof into a valuable storage area

ALUMINIUM - RATED FOR 136 kgs




FEATURES AND BENEFITS:


- Rails made of heavy duty aluminum extrusions for added strength.
- Steps riveted to rail with solid aluminum rivets for a secure fit.
- Aluminum steps are serrated to resist slipping.
- Power arm hinge features one piece construction, no welded joints.
- Easily adjustable spring tension.
- Complete installation kit with simple to understand instructions.
- Extra corner bracing keeps stairway frame square.
- Exclusive "EZ - Hang Strap" system for quick and easy installation.

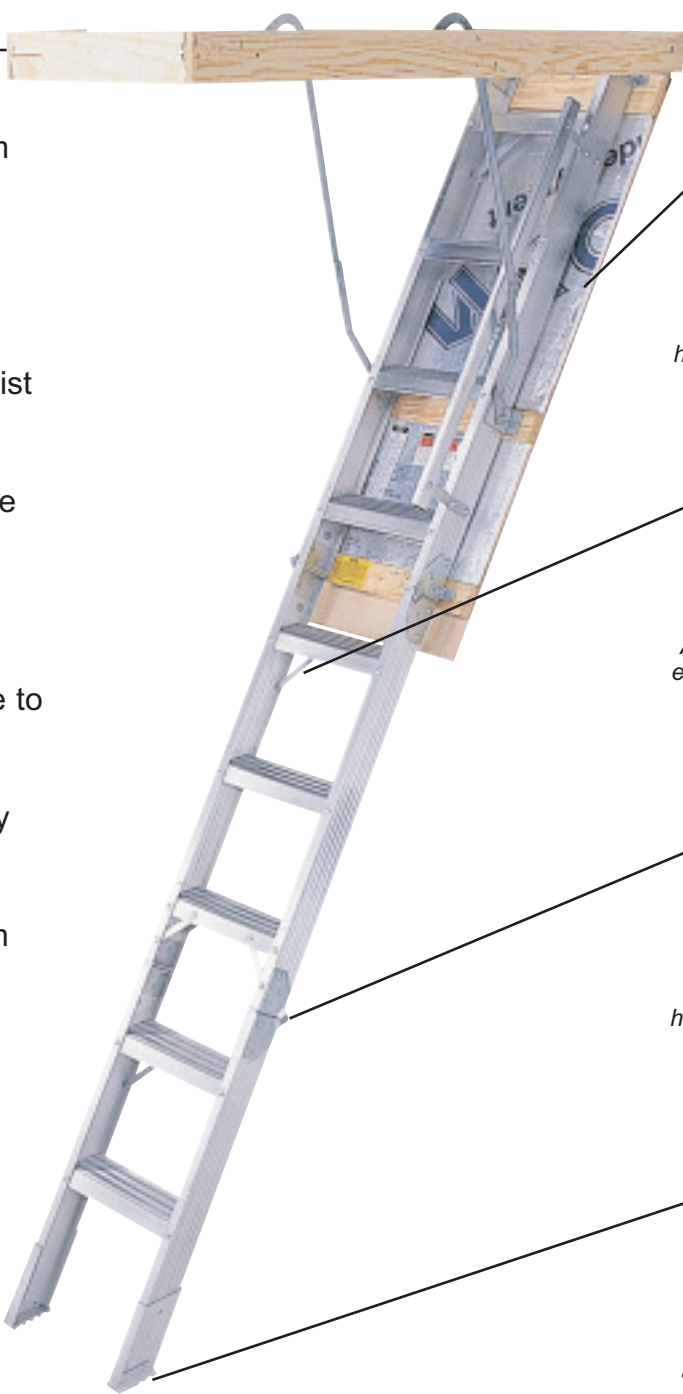


Fully insulated door void helps reduce energy costs

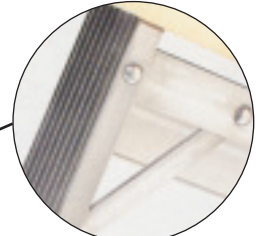


Angle bracing on top of each climbing section for strength and stability

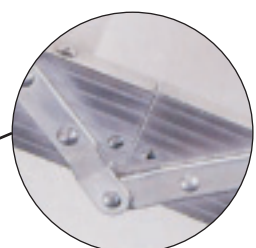

Heavy duty aluminum hinges at rail joints prevent side to side motion

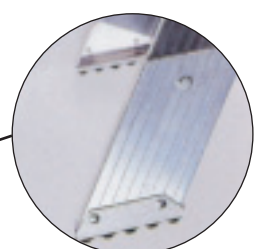

Custom fit with fully adjustable foot assembly

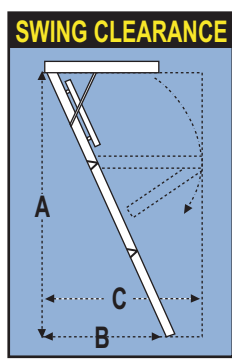

MODEL	APPROX. OPENING	(A) CEILING HEIGHT RANGE	(B) LANDING SPACE	(C) PROJECTION	STEP WIDTH X LENGTH X DEPTH	SIDE RAIL WIDTH X DEPTH	DOOR PANEL WIDTH X LENGTH
KASW03 DS	570 X 1370	2130 to 2665 84" to 105"	1700	1800	84 X 316 X 40	83 X 19	525 X 1327
KASW04 DS	570 X 1370	2665 to 3048 105" to 120"	1850	2000	84 X 316 X 40	83 X 19	525 X 1327
KASW05 DS	647 x 1600	3048 x 3657 120" x 144"	2100	2200	82 x 378 x 40	83 x 25	615 x 1588

Roofstore Access Ladders

PO Box 17, Wurtulla QLD 4557
(07) 5492 3446 email@roofstore.com.au

Roofstore Trust trading as RoofStore Access Ladders
ABN 49 654 874 251 / BSA 1034125