



edson solar

edson *Gas*

Gas Boosted Solar Hot Water

- ✓ Reduce your hot water power bill by up to 90%*
- ✓ Evacuated Solar Tubes provide superior heat output, even on cloudy days
- ✓ Tested to Australian Standards for frost protection (-15°C)
- ✓ Generous Government rebates still apply





1300 880 154 | www.edson.com.au




HOW THE SYSTEM WORKS

Solar energy is absorbed and retained by the coated surface and transferred to the Copper Heat Pipe inside the tube.

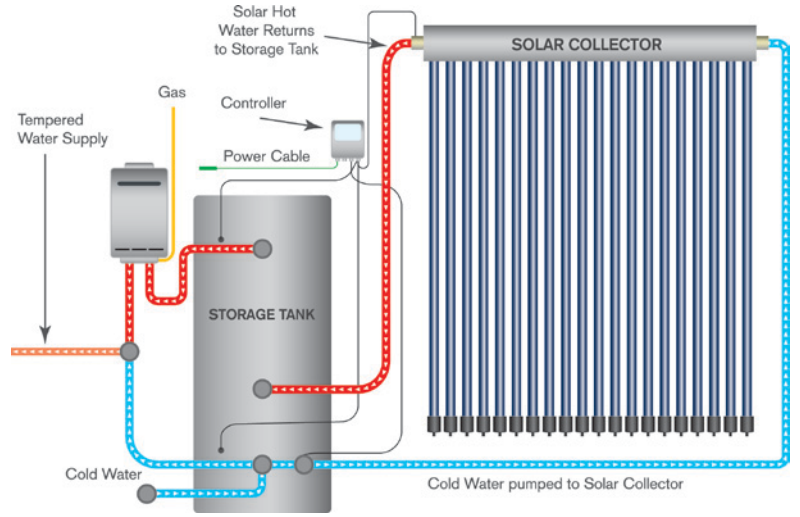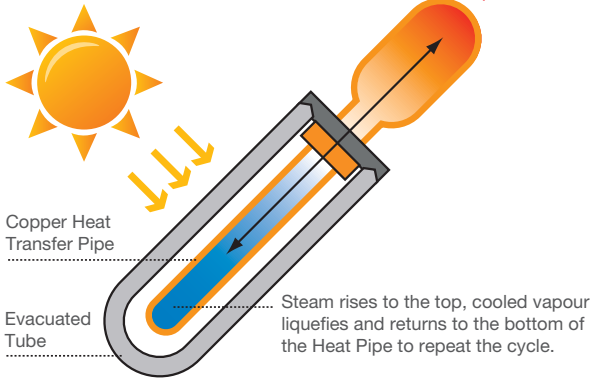

INSTANTANEOUS GAS BOOST



SPECIFICATION	S20 (LP/NG)	S26 (LP/NG)
Hot Water Delivery	20L per minute	26L per minute
Megajoule Rating	160Mj/hr	199Mj/hr
Water Pressure Min.	120kPa	160kPa
Bathrooms	1 to 2	2 plus


All systems are available as S20 and S26 models using LPG or Natural Gas. Contact your authorised Edson reseller for installation information.

USAGE CHART


DOMESTIC USAGE	1-3	3-5	6+
Vitreous Storage Tank	270L	315L	400L
Stainless Steel Storage Tank	250L	315L	400L
Evacuated Tubes	20, 25 or 30	25, 30 or 40	50, 40 or 60

For commercial installations, contact your nearest Edson authorised reseller or refer to www.edson.com.au.

STORAGE TANKS

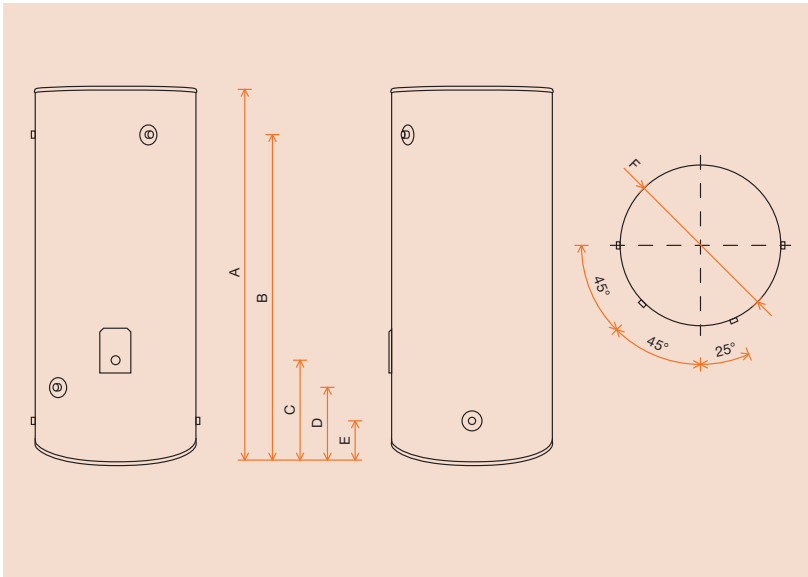

EVACUATED TUBES

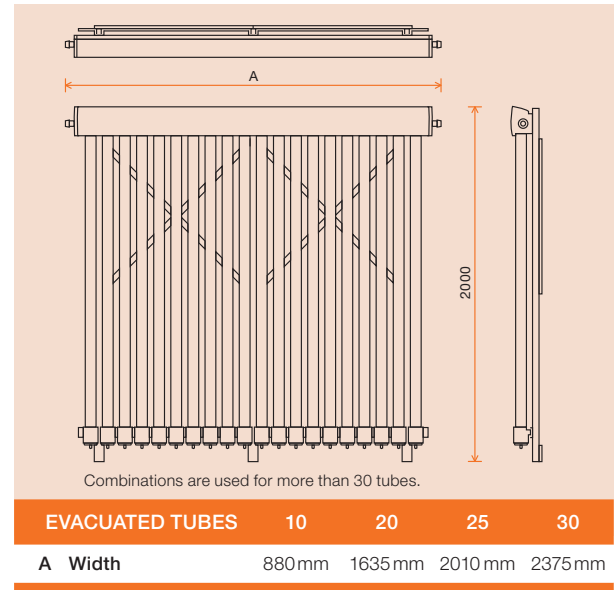

SPECIFICATION	270 L GLES	315 L GLES	400 L GLES	250 L SS	315 L SS	400 L SS
A Height	1400mm	1690mm	1710mm	1900mm	2145mm	1800mm
B Hot Water Outlet & PTR Valve	1170mm	1470mm	1670mm	1545mm	1795mm	1430mm
C Solar Return	380mm	575mm	680mm	325mm	520mm	490mm
D Cold Water Inlet	170mm	170mm	170mm	325mm	325mm	315mm
E Diameter	650mm	650mm	730mm	590mm	590mm	685mm
Gas Supply	Natural or LPG	Natural or LPG	Natural or LPG	Natural or LPG	Natural or LPG	Natural or LPG
Gas Flow Rate	1.13–2.75kPa	1.13–2.75kPa	1.13–2.75kPa	1.13–2.75kPa	1.13–2.75kPa	1.13–2.75kPa
Water Flow Minimum	2.5L per minute	2.5L per minute	2.5L per minute	2.5L per minute	2.5L per minute	2.5L per minute
Ambient Water Temp Rise	25°C	25°C	25°C	25°C	25°C	25°C
Material	Vitreous Enamel	Vitreous Enamel	Vitreous Enamel	Stainless Steel	Stainless Steel	Stainless Steel

All dimensions displayed in millimetres. All information and guidelines outlined were correct at the time of printing.

*Depending on the climate and the model of heater.



Sales: 1300 880 154 | Service 1300 303 779

Fax: + 61 3 9548 5176 | P.O. Box 5008, Cheltenham East, VIC 3192

Email: sales@edson.com.au | www.edson.com.au | ABN 77 065 515 967

