



# Hotflo

Electric Storage Systems

**Rinnai**

*Relax. It's a Rinnai.*



## Benefits at a glance



- > Full range of capacities to suit all applications – 25 to 400 litres
- > Standard sizing perfect for emergency changeover
- > Single or twin element configurations
- > Complete range of elements and anodes
- > Dual handed for flexible installation
- > Suitable for internal and external installations<sup>#</sup>
- > 7 year cylinder warranty on all models
- > Class leading Rinnai quality and durability

<sup>#</sup>25 and 50L internal installation only.



## Product Specifications

Models		25L	25L with plug	50L	50L with plug	80L	125L	160L	250L	315L	400L
Total Height (mm)	A	452	452	694	694	900	1245	1530	1475	1762	1820
Width incl. PTR Valve (mm)		490	490	490	490	590	590	590	700	700	760
Diameter (mm)	B	415	415	415	415	515	515	515	625	625	685
Outlet Height (mm)	C	297	297	524	524	685	1020	1310	1215	1430	1545
Inlet Height (mm)	D	153	153	158	158	225	225	225	90	90	260
Electrical Entry - Lower (mm)	E	80	80	80	80	155	155	155	50	50	155
Electrical Entry - Upper (mm)	F	N/A	N/A	N/A	N/A	N/A	N/A	946	978	1193	1224
Dry Weight (kg)		20	20	27	27	43	56	66	84	94	102

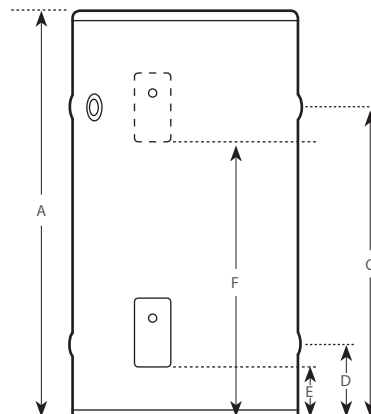



# Technical Specifications

Models	25L	25L with plug	50L	50L with plug	80L	125L	160L	250L	315L	400L
Storage Capacity (L)	33	33	55	55	84	140	179	271	336	424
Hot Water Delivery (L)	25	25	50	50	80	125	160	250	315	400
Element Size (kW)*	3.6	1.8, 2.4	3.6	1.8, 2.4	1.8, 2.4, 3.6	1.8, 2.4, 3.6	1.8, 2.4, 3.6	2.4, 3.6, 4.8	3.6, 4.8	3.6, 4.8
Boost Capacity (Twin element only) (L)	N/A	N/A	N/A	N/A	N/A	N/A	42	50	65	84
Incl. PTR Valve (kPa)	1000						850			
ECV (kPa)	850						700			
Max. Inlet Pressure with ECV (kPa)	680						550			
PLV with ECV (kPa)	500									
Max. Inlet Pressure without ECV (kPa)	800						680			
PLV without ECV (kPa)	500									
Max. Thermostat Setting (°C)	75									
Ingress Protection Rating	IPX4									
Electrical Supply	240V - @50Hz									
Tank Body Colour	White	White	White	White	Dune	Dune	Dune	Dune	Dune	Dune
Port Size (mm)	20									

\*Hard water anodes available on most models.

## Warranty\*

### All Models

Parts and Labour

1 Year

Cylinder

7 Years

\*Please note: Rinnai Australia reserves the right to make modifications and change specifications without notice. However, we will endeavour to communicate major changes well before implementation. Dimensions are subject to production tolerances and may vary slightly from those given. For full definitions of Domestic and Commercial use along with the full warranty conditions and exclusions, please refer to the owners manual. The images reproduced in this brochure are not to scale and may vary to the colour of the represented product.

**Rinnai Australia Pty Ltd**

ABN 74 005 138 769

10-11 Walker Street,  
Braeside, Victoria 3195

For further information visit

**[www.rinnai.com.au](http://www.rinnai.com.au)**

or call 1300 555 545

**Rinnai**

*Relax. It's a Rinnai.*