



LED PRODUCT
CATALOGUE
2013-2014



ABOUT US



SEED POWER is located in Sydney, Australia. We pride ourselves as the most passionate and the most reliable distributor in the renewable energy industry.

With our previous successful experience in solar related products distribution, we have already established good relationship with many electrician companies nationwide, giving rise, for us, to understand the REAL demand of the market and end customers. Therefore we are CONFIDENT to provide such products at the most competitive price for both residential and commercial customers to achieve their goals.

Our main customers are targeted at retail lighting shops and electrical wholesalers. Our product range covers close to LED bulbs, LED down lights, LED shop lights, LED flood lights, LED high bay lights and many more.

Planting a seed is easy however planting the idea of keeping the world we are living clean is hard. The goal of SEED POWER is focused on spreading the dream of cleaner world by supplying environmental friendly products to Australia. If you have the same dream, please stay and work with us.

QUALITY ASSURANCE

In SEED POWER, we believe that a “quality management policy” is a company’s statement of intent. The statement spells out a Servicing Licensee’s intention and direction with regard to quality management and how it is applied in its business activities.

Accompany with the world leading LED manufacturers back in Asia, SEED POWER has experience and expertise in the supply chain of qualified products. It is our policy to ensure that any products sold in Australia complies with the related Australian safety standards.



SMD LED DOWNLIGHTS

**EPISTAR
LM-80**



Model: SPR1201-CL109

Input Voltage: AC110-265V 50/60HZ


Power Rating: 9W

Lumens: 750lm~800lm

Color: ● 3000K ● 4000K ● 5000K ○ 6000K

Beam Angle: 120°

Ra>80

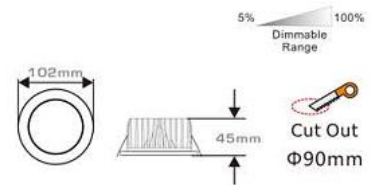

**EPISTAR
LM-80**



Model: SPR1201-CL130
SPR1201-CL150

Input Voltage: AC110-265V 50/60HZ


Power Rating: 13W/15W

Lumens: 920lm~1000lm/1250lm~1350lm


Color: ● 3000K ● 4000K ● 5000K ○ 6000K

Beam Angle: 120°

Ra>80

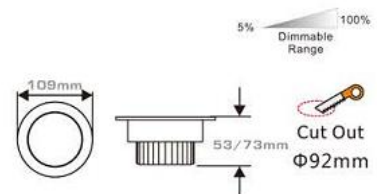

EPISTAR LM-80



Model: SPR1201-CL121

Input Voltage: AC110-265V 50/60HZ


Power Rating: 12W

Lumens: 850lm-950lm

Color: ● 3000K ● 4000K ● 5000K ○ 6000K

Beam Angle: 120°

Ra>80

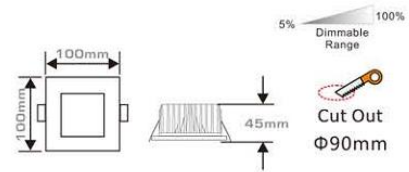

EPISTAR LM-80



Model: SPR1201-CL120

Input Voltage: AC110-265V 50/60HZ


Power Rating: 12W

Lumens: 850lm-950lm

Color: ● 3000K ● 4000K ● 5000K ○ 6000K

Beam Angle: 120°

Ra>80

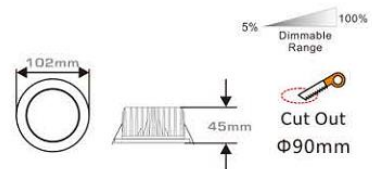

EPISTAR LM-80



Model: SPR1001-CL110

Input Voltage: AC110-265V 50/60HZ


Power Rating: 10W

Lumens: 750lm-850lm

Color: ● 3000K ● 4000K ● 5000K ○ 6000K

Beam Angle: 120°

Ra>80

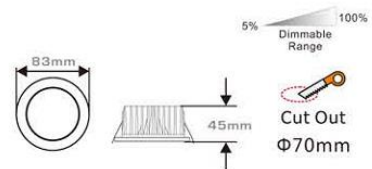


LED SHOPLIGHTS



EPistar

Color: ● 3000K ○ 4000K ○ 6000K




Model	Voltage	Lumens	Power	Cut out	Beam Angle	Size	Dimmable
SPR1201-DLC101	AC110-265V	850-1000lm	12W	φ 130mm	120°	φ135X70	Yes
SPR1201-DLC102	AC110-265V	1000-1200lm	12W	φ 175mm	120°	φ195X70	Yes
SPR1201-DLC1501	AC110-265V	1350-1550lm	15W	φ 175mm	120°	φ195X70	Yes
SPR1201-DLC2001	AC110-265V	1650-1880lm	20W	φ 175mm	120°	φ195X70	Yes
SPR1201-DLC2002	AC110-265V	1650-1880lm	20W	φ 200mm	120°	φ230X70	Yes
SPR1201-DLC3001	AC110-265V	2600-2800lm	30W	φ 200mm	120°	φ230X70	Yes



LM-80

Color: ● 3000K ● 4000K ○ 5000K ○ 6000K (EPISTAR)

Beam Angle: 120°



Model	Voltage	Lumens	Power	Cut out	LED type	Size	Dimmable
SPR 501-CL108	AC110-265V	350-450lm	5W	φ85mm	EPISTAR	φ110X40	Yes
SPR 701-CL108	AC110-265V	500-550lm	7W	φ85mm	EPISTAR	φ110X40	Yes
SPR 1201-CL111	AC110-265V	650-750lm	10W	φ115mm	EPISTAR	φ144X40	Yes
SPR 1201-CL115	AC110-265V	1000-1100lm	15W	φ155mm	EPISTAR	φ180X40	No
SPR 1201-CL120	AC110-265V	1500-1600lm	20W	φ165mm	EPISTAR	φ193X40	No
SPR 1201-CL125	AC110-265V	1950-2050lm	25W	φ205mm	EPISTAR	φ230X50	No


LED FLOODLIGHTS



Driver inside

Color: ● 3000K ● 4000K ● 6000K (BRIDGELUX)

Beam Angle: 120°




Model	Voltage	Lumens	Power	LED type	Size
SPR 1201-FL11	AC110-265V	800-1000lm	10W	BRIDGELUX	180X140X80
SPR 1201-FL21	AC110-265V	1600-2000lm	20W	BRIDGELUX	290X120X120
SPR 1201-FL31	AC110-265V	2400-2800lm	30W	BRIDGELUX	290X220X120
SPR 1201-FL51	AC110-265V	4000-4500lm	50W	BRIDGELUX	355X290X145
SPR 1201-FL71	AC110-265V	5600-6300lm	70W	BRIDGELUX	355X290X145



Driver inside

Color: ● 3000K ○ 4000K ○ 6000K (BRIDGELUX)

Beam Angle: 120°



Model	Voltage	Lumens	Power	LED type	Size
SPR1201-FL10	AC110-265V	800-1000lm	10W		87X115X90
SPR1201-FL20	AC110-265V	1600-2500lm	20W		180X140X105
SPR1201-FL30	AC110-265V	2400-2800lm	30W		225X188X133
SPR1201-FL70	AC110-265V	5600-8300lm	70W		285X360X110
SPR1201-FL80	AC110-265V	6400-7500lm	80W		285X360X110
SPR1201-FL101	AC110-265V	8000-1000lm	100W		285X370X110




New!

Beam Angle
120°

Model: SPR1201-FL51
SPR1201-FL71

Input Voltage: AC 110V~265V 50/60Hz
Power Rating: 50W/70W
Lumens: 4000lm~4500lm/5600lm~6300lm
Shell Materials: Aluminum

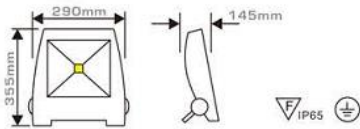


New!

Beam Angle
120°

Model: SPR1201-FL80
SPR1201-FL101


Input Voltage: AC 110V~265V 50/60Hz
Power Rating: 80W/100W
Lumens: 6400lm~7500lm/8000lm~10000lm
Shell Materials: Aluminum

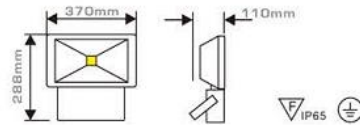

Beam Angle
60°

Model: SPR1201-FL102
SPR1201-FL1402


Input Voltage: AC 110V~265V 50/60Hz
Power Rating: 100W/140W
Lumens: 8000lm~10000lm/10000lm~11000lm
Shell Materials: Aluminum



Beam Angle
120°

Model: SPR1201-FL103
SPR1201-FL1401

Input Voltage: AC 110V~265V 50/60Hz
Power Rating: 100W/160W
Lumens: 8000lm~10000lm/11200lm~13000lm
Shell Materials: Aluminum



LED HIGH BAY



Color: ● 3000K ● 4000K ○ 6000K (BRIDGELUX)

Beam Angle: 60°/120°



Model	Voltage	Lumens	Power	LED type	Size
SPR1201-HB3001	AC110-265V	2600-3000lm	30W	BRIDGELUX	φ160X65
SPR1201-HB5001	AC110-265V	4000-5000lm	50W	BRIDGELUX	φ160X110
SPR1201-HB7001	AC110-265V	5600-7000lm	70W	BRIDGELUX	φ160X150
SPR1201-HB8001	AC110-265V	7000-8000lm	80W	BRIDGELUX	φ160X150
SPR1201-HB1001	AC110-265V	8000-9000lm	100W	BRIDGELUX	φ160X190
SPR1201-HB1201	AC110-265V	10000-11000lm	120W	BRIDGELUX	φ420X430
SPR1201-HB1501	AC110-265V	12000-13000lm	150W	BRIDGELUX	φ250X190
SPR1201-HB2001	AC110-265V	15000-17000lm	200W	BRIDGELUX	φ250X260

COB LED SPOTLIGHT



Ra > 80

Color: ● 2700K ● 3000K ○ 4000K ○ 5000K (**CREE**)
 ● 3000K ● 4000K ○ 6000K (**EPISTAR**)
 ● 3000K ● 5000K (**CITIZEN**)

Beam Angle: 30°/60°
 Base: MR16/GU10/GU5.3/E27



Model	Voltage	Lumens	Power	LED type	Size	Dimmable
SPR401-SPC103	AC110-265V	380-420lm	4.5W	EPISTAR	φ50X62	No
SPR401-SPC103	AC/DC12V	380-420lm	4.5W	EPISTAR	φ50X62	No
SPR401-SPC104	AC110-265V	380-420lm	4.5W	CREE	φ50X62	No
SPR401-SPC104	AC/DC12V	380-420lm	4.5W	CREE	φ50X62	No
SPR501-SPC102	AC110-265V	470-520lm	5W	EPISTAR	φ50X85	Yes
SPR501-SPC102	AC/DC12V	470-520lm	5W	EPISTAR	φ50X85	No
SPR501-SPC103	AC110-265V	500-550lm	6W	CREE	φ50X85	Yes
SPR501-SPC103	AC/DC12V	500-550lm	6W	CREE	φ50X85	No
SPR701-SPC103	AC110-265V	580-630lm	7W	EPISTAR	φ50X105	Yes
SPR701-SPC105	AC110-265V	580-630lm	7W	CREE	φ50X105	Yes
SPR701-SPC104	AC 12V	600-650lm	8W	CITIZEN	φ50X100	Yes





Beam Angle
30°/60°

**EPISTAR
CREE**

Model: **SPR701-SPC106**

Input Voltage: AC 110V-265V 50/60Hz
Power Rating: 7W
Lumens: 580lm-630lm
Ra>80



New!


PAR38 ∇ IP65

Beam Angle
120°

EPISTAR

Model: **SPR1201-PAC1301**

Input Voltage: AC 110V-265V 50/60Hz
Power Rating: 13W
Lumens: 900lm-960lm
Ra>80





New!

Beam Angle
30°/60°

EPISTAR

Model: **SRP901-SPC101**

Input Voltage: AC 110V-265V 50/60Hz
Power Rating: 9W
Lumens: 670lm-750lm
Ra>80





New!

Beam Angle
30°/60°

EPISTAR

Model: **SPR1001-SPC101**


Input Voltage: AC 110V-265V 50/60Hz
Power Rating: 10W
Lumens: 700lm-850lm
Ra>80



COB LED DOWNLIGHTS




Ra > 80



Color: ● 2700K ● 3000K ○ 4000K ○ 5000K (**CREE**)
 ● 3000K ● 4000K ○ 6000K (**EPISTAR**)
 ● 3000K ● 5000K (**CITIZEN**)

Beam Angle:30°/60°
 Twist:45°




Model	Voltage	Lumens	Power	Cut out	LED type	Size	Dimmable
SPR 501-CLC104	AC110-265V	420-460lm	5W	φ75	CREE	φ87X53	Yes
SPR 701-CLC104	AC110-265V	600-650lm	7W	φ75	CREE	φ87X53	Yes
SPR 1001-CLC106	AC110-265V	800-900lm	10W	φ75	CREE	φ87X82	Yes
SPR 1001-CLC102P	AC110-265V	800-900lm	10W	φ75	CREE	φ87X82	Yes ^{▽IP64}
SPR 1001-CLC107	AC110-265V	800-900lm	10W	φ92	CREE	φ105X105	Yes
SPR 1201-CLC105	AC110-265V	900-1000lm	12W	φ92	CREE	φ105X105	Yes
SPR 1201-CLC106	AC110-265V	1050-1200lm	15W	φ92	CREE	φ105X115	Yes




Ra > 80

CHROME WHITE



Color: ● 2700K ○ 3000K ○ 4000K ○ 5000K (CREE)
 ● 3000K ○ 4000K ○ 6000K (EPISTAR)
 ● 3000K ○ 5000K (CITIZEN)

Beam Angle: 30°/60°
 Twist: 45°



Model	Voltage	Lumens	Power	Cut out	LED type	Size	Dimmable
SPR501-CLC201	AC110-265V	420-460lm	5W	φ75-95	CREE	φ110X57	Yes
SPR701-CLC201	AC110-265V	600-650lm	7W	φ75-95	CREE	φ110X57	Yes
SPR1001-CLC201	AC110-265V	800-900lm	10W	φ75-95	CREE	φ110X87	Yes
SPR1201-CLC201	AC110-265V	900-1000lm	12W	φ75-95	CREE	φ110X110	Yes

CITIZEN
Micro HumanTech

LED inside




Ra > 80



Color: ● 2700K ● 3000K ○ 4000K ○ 5000K (CREE)
● 3000K ● 4000K ○ 6000K (EPISTAR)
● 3000K ● 5000K (CITIZEN)

Beam Angle:30°/60°
Twist:45°



Model	Voltage	Lumens	Power	Cut out	LED type	Size	Dimmable
SPR1001-CLC104	AC110-265V	750-850lm	10W	φ75	CITIZEN	φ87X82	Yes
SPR1001-CLC101P	AC110-265V	750-850lm	10W	φ75	CITIZEN	φ87X82	Yes 
SPR1001-CLC105	AC110-265V	800-900lm	10W	φ92	CITIZEN	φ105X105	Yes
SPR1201-CLC103	AC110-265V	900-1000lm	12W	φ92	CITIZEN	φ105X105	Yes
SPR1201-CLC104	AC110-265V	1050-1200lm	15W	φ92	CITIZEN	φ105X115	Yes


CITIZEN EPISTAR LED inside

Micro HumanTech




Ra > 80

CHROME WHITE



Color: ● 2700K ○ 3000K ○ 4000K ○ 5000K (**CREE**)
 ● 3000K ○ 4000K ○ 6000K (**EPISTAR**)
 ● 3000K ○ 5000K (**CITIZEN**)




Beam Angle: 30°/60°
 Twist: 45°

Model	Voltage	Lumens	Power	Cut out	LED type	Size	Dimmable
SPR1001-CLC202	AC110-265V	800-900lm	10W	φ75-95	CITIZEN	φ110X87	Yes
SPR1201-CLC203	AC110-265V	900-1000lm	12W	φ75-95	CITIZEN	φ110X110	Yes
SPR1201-CLC202	AC110-265V	1050-1200lm	15W	φ75-95	CITIZEN	φ110X110	Yes
SPR1001-CLC203	AC110-265V	800-900lm	10W	φ75-95	EPISTAR	φ110X87	Yes
SPR10201-CLC204	AC110-265V	900-1000lm	12W	φ75-95	EPISTAR	φ110X110	Yes
SPR1201-CLC205	AC110-265V	1050-1200lm	15W	φ75-95	EPISTAR	φ110X110	Yes

EPISTAR LED inside




Ra > 80



Color: ● 2700K ● 3000K ● 4000K ● 5000K (**CREE**)
 ● 3000K ● 4000K ● 6000K (**EPISTAR**)
 ● 3000K ● 5000K (**CITIZEN**)

Beam Angle: 30°/60°
 Twist: 45°





Model	Voltage	Lumens	Power	Cut out	LED type	Size	Dimmable
SPR 501-CLC103	AC110-265V	420-460lm	5W	φ75	EPISTAR	φ87X53	Yes
SPR 701-CLC103	AC110-265V	600-650lm	7W	φ75	EPISTAR	φ87X53	Yes
SPR 701-CLC105B	AC110-265V	600-650lm	7W	φ92	EPISTAR	φ87X53	Yes
SPR 901-CLC101	AC110-265V	650-720lm	9W	φ75	EPISTAR	φ87X82	Yes
SPR 1001-CLC104	AC110-265V	800-900lm	10W	φ75	EPISTAR	φ87X82	Yes
SPR 1001-CLC101P	AC110-265V	750-850lm	10W	φ75	EPISTAR	φ87X82	Yes 
SPR 901-CLC102B	AC110-265V	800-900lm	10W	φ92	EPISTAR	φ87X82	Yes
SPR 1001-CLC105	AC110-265V	800-900lm	10W	φ92	EPISTAR	φ105X105	Yes
SPR 1201-CLC103	AC110-265V	900-1000lm	12W	φ92	EPISTAR	φ105X105	Yes
SPR 1201-CLC104	AC110-265V	1050-1200lm	15W	φ92	EPISTAR	φ105X115	Yes




Model: SPR1001-CLC101P

Input Voltage: AC 110V~265V 50/60Hz
 Power Rating: 10W
 Lumens:750lm~850lm
 Ra>80

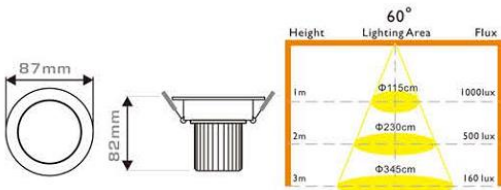



Model: SPR1201-CLC101P

Input Voltage: AC 110V~265V/ 50/60Hz
 Power Rating: 15W
 Lumens:1050lm~1200lm
 Ra>80




Model: SPR1201-CLC104

Input Voltage: AC 110V~265V 50/60Hz
 Power Rating: 15W
 Lumens:1050lm~1200lm
 Twist Angle:45°
 Ra>80

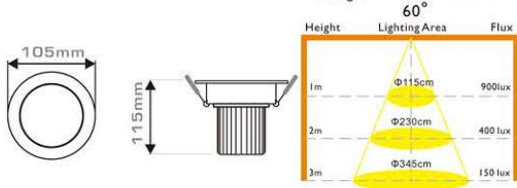

Model: SPR1201-CLC2001/3501/5001

Input Voltage: AC 110V~265V 50/60Hz
 Power Rating: 20W/35W/50W
 Lumens:1450lm~1600lm/2000lm~2300lm/4000lm~4200lm
 Twist Angle:25°
 Ra>80



THANK YOU FOR VIEWING

FOR MORE INFORMATION
PLEASE VISIT OUR WEBSITE

Via

www.seedpower.com.au

or simply scan

